




# SCOPE SPECS



SERIES / MODEL	DIMENSIONS (inches)							WEIGHT (ounces)	MAG. (x)	OBJ. DIA. (mm)	FIELD OF VIEW (feet@100yards)		EYE RELIEF (inches @ .75 diopter)		PARALLAX SETTING (yards)	CLICK VALUE (inches @100yds)	RANGE OF ADJUSTMENT (inches, all directions from center @100yds.)	RETICLE TYPE	BATTERY
	A	B	C	D	E	F	G				High Power	Low Power	High Power	Low Power					
<b>TRU•BRITE™ XTREME</b>																			
TG8539BXB	11.12	4.25	1.47	1.40	1.80	2.01	1.00	17.3	3-9	44	12.1	37.4	4.75	5.50	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
TG8539LXB	13.11	6.46	2.46	2.68	1.80	2.01	1.00	18.2	3-9	44	11.52	32.25	4.3	4.3	100	0.25	35.0	2 Color IR BDC (Centerfire)	CR2032
TG8531BXB	12.20	5.00	2.09	1.65	1.80	2.01	1.00	17.5	3-12	44	8.6	31.1	4.50	5.00	100	0.25	20.0	2 Color IR BDC (Centerfire)	CR2032
TG8541BXB	13.89	5.12	2.17	1.57	1.80	2.36	1.00	22.8	4-16	50	5.7	24.2	4.50	5.00	15 - ∞	0.25	20.0	2 Color IR BDC (Centerfire)	CR2032
<b>TRU•BRITE™ MUZZLELOADER BDC</b>																			
TG8531BLM	12.28	4.80	1.85	1.46	1.80	2.00	1.00	17.1	3-12	44	8.64	31.1	4.25	5.25	100	0.25	20.0	2 Color IR BDC (Muzzleloader)	CR2032
<b>TRU•BRITE™ 30 HUNTER</b>																			
T8514BC	9.88	5.70	2.81	1.50	1.67	1.18	1.18	13.0	1-4	24	23.03	92.60	3.15	3.70	50	0.50	50	Circle Duplex	-
<b>COMPACT 4X32</b>																			
TG8504BR	9.80	3.80	1.60	1.06	1.46	1.46	1.00	12.5	4	32	-	20.79	-	5.50	100	0.25	30.0	Duplex	-
TG8504BD/CD	9.80	3.80	1.60	1.06	1.46	1.46	1.00	12.5	4	32	-	20.79	-	5.50	100	0.25	30.0	Diamond Ballistic	-
<b>TRUSHOT™</b>																			
TG850432B	11.30	5.75	2.50	2.13	1.54	1.54	1.00	9.7	4	32	-	33.41	-	3.94	50	0.25	30.0	Duplex	-
TG852732B	12.72	6.54	2.95	2.36	1.65	1.54	1.00	12.9	2-7	32	12.67	41.47	3.15	3.35	100	0.25	30.0	Duplex	-
TG853932B	11.46	5.63	2.60	1.97	1.54	1.54	1.00	12.9	3-9	32	12.67	47.23	3.35	3.94	100	0.25	30.0	Duplex	-
TG853940B	12.12	5.62	2.54	1.93	1.54	1.85	1.00	13.7	3-9	40	12.67	41.47	3.15	3.94	100	0.25	30.0	Duplex	-
<b>HUNT-TEC™</b>																			
TG8504A	8.07	3.09	0.84	1.01	1.61	1.54	1.00	12.5	4	32	5.8°	-	4.50	-	100	0.50	40.0	Duplex	-
TG8504AL	8.06	3.24	1.1	0.97	1.58	1.54	1.00	13.2	4	32	5.6°	-	4.50	-	100	0.50	40.0	IR Duplex	CR2032

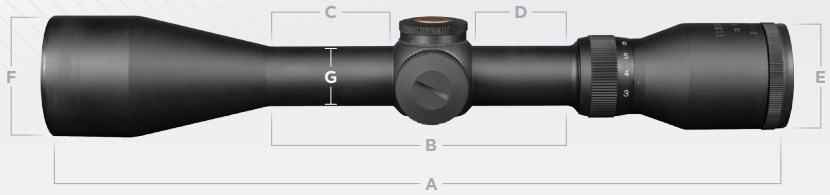

### BDC

Bullet-Drop Compensating reticle can be easily calibrated to provide aiming points from 100 to 600 yards for centerfire loads and aiming points out to 300 yards for various muzzleloader bullet / powder combinations.



### DUPLEX

Duplex reticle provides fast target acquisition in any lighting condition.



### CIRCLE DUPLEX

Duplex reticle provides fast target acquisition with a simple circular frame of reference for patterning shotguns, ranging targets, or simple holdover reference.



### DIAMOND BALLISTIC

Specially designed for the deer or turkey hunter. Diamond reticle measures 5 inches at 40 yards.



View this chart online or save it to your device